

HOLLOW LO-TEMP GASKET ADHERED TO DOOR LIP AND ADJUSTABLE STOP ANGLES AT HEAD AND SIDES.

2 X 2 X 1/4" STEEL ADJUSTABLE GASKET ANGLE AT HEAD AND SIDES.

RIGID FRONT SILL SEAL ASSEMBLY

RIGID BACK SILL SEAL ASSEMBLY

FLOOR LINE IN FRONT OF DOOR.

1 1/2 X 1 1/2 X 1/4" STEEL GASKET ANGLE

3/8 X 1 1/2" HALF OVAL WELDED TO SILL

8" STEEL CHANNEL FRAME AT SIDES, HEAD AND SILL

VERTICAL SECTION

HEIGHT IN CLEAR (H.I.C.)  
FRAME OPENING HEIGHT = H.I.C. PLUS 2"

8C11.5 STRUCTURAL STEEL CHANNEL FRAME AT FOUR SIDES OTHER CONFIGURATIONS AVAILABLE

FRAME OPENING WIDTH = W.I.C. PLUS 4 1/2"

WIDTH IN CLEAR (W.I.C.)

THRU ROD FOR BACK OPERATION

MASONRY WALL ANCHOR

MONOLITHIC WALL ANCHOR

2 X 2 X 1/4" STEEL GUSSET.

HOLLOW LO-TEMP GASKET ADHERED TO LIP OF DOOR

HORIZONTAL SECTION

FOR MASONRY WALLS:

3/16 X 1 1/2 X 8" STEEL ANCHORS, LOCATED ON 16" CENTERS.


JAMISON FSR HINGE WITH BRONZE THRUST BUSHINGS, 3 REQ'D.  
1/2-13 NC X 1 1/4" LG. HEX HEAD MACHINE BOLTS, 12 REQ'D.

JAMISON CH-4295-21 LIFTING BRACKET. REMOVE AFTER INSTALLATION AND REINSTALL BOLTS.

FOR MONOLITHIC WALLS:

1/2" X 6 1/8" H4L CONCRETE ANCHORS ON 8" CENTERS AT HEAD AND SIDES.

JAMISON 2 POINT W-2 FASTENER WITH THRU ROD.

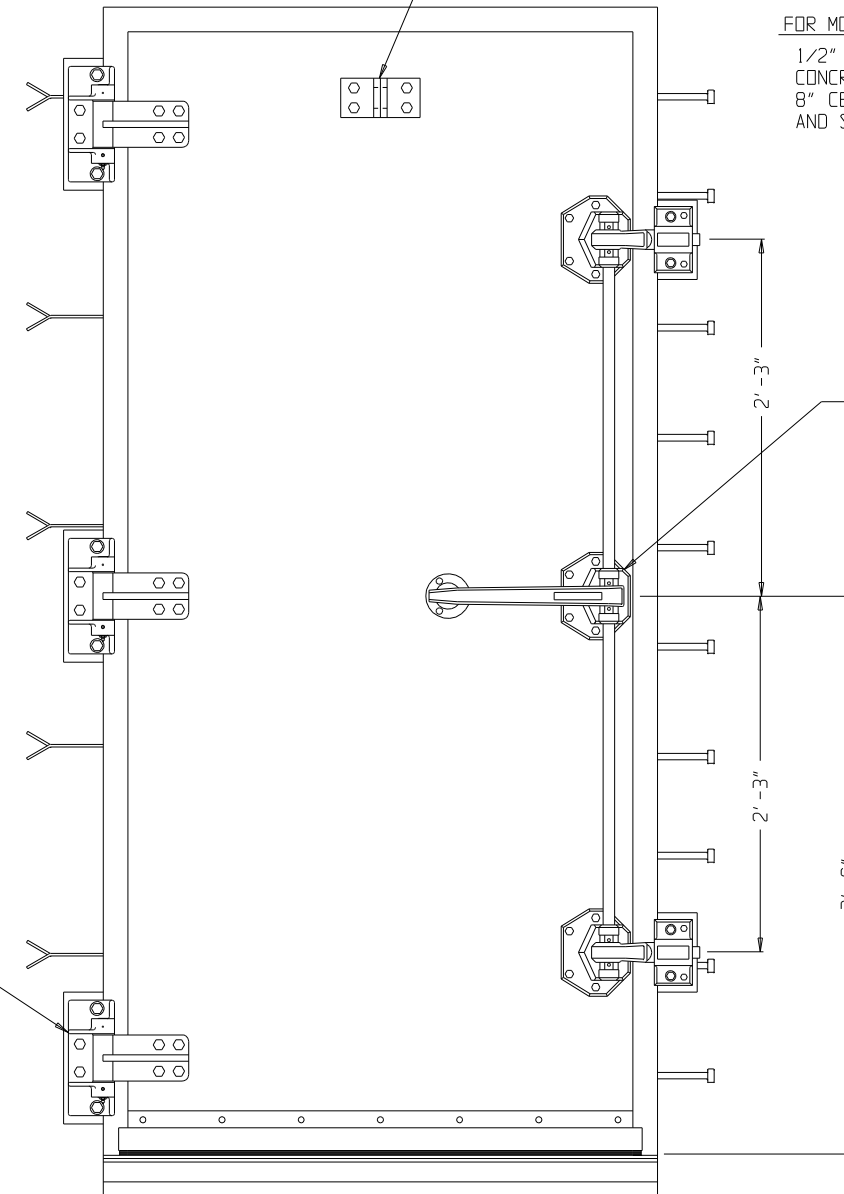

FRONT ELEVATION  
LEFT HAND SWING SHOWN - RIGHT HAND SWING OPPOSITE

SCALE(S) NONE		JOB NAME					
DATE	DRAWN	SOUND REDUCTION AND SPECIAL SALES					
6-17-92	W.H.B.						
CHECKED	APPROVED	TITLE	LTR	DATE	BY	SUBJECT	
		STC 50 STANDARD SINGLE PERSONNEL DOOR				REVISIONS	
JAMISON DOOR COMPANY P. O. BOX 70 HAGERSTOWN, MARYLAND 21741				NO. CH-4424-1			