


FRONT ELEVATION  
(LOOKING TOWARD  
InVasion DOOR)

SIDE VIEW

DOOR NUMBER	DOOR QUANTITY	SIZE IN CLEAR W.I.C. H.I.C.	*ELECTRICAL DATA		TEMPERATURE HUMIDITY CONDITIONS		RELATIVE HUMIDITY ON WARM SIDE %
			VOLTS	HERTZ	FRONT	BACK	

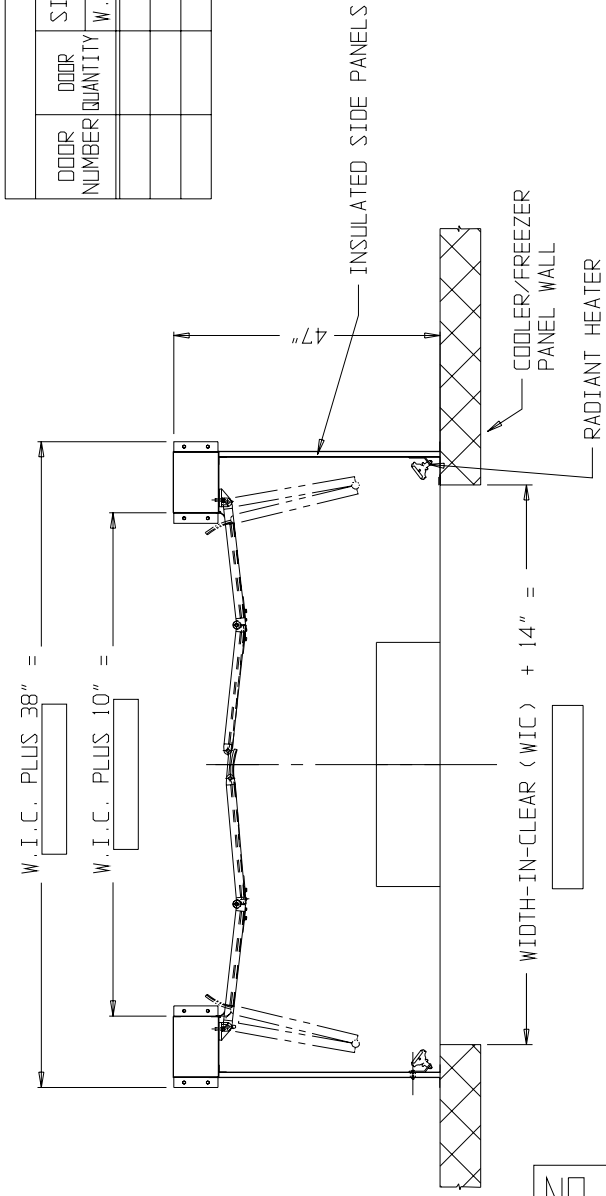

HORIZONTAL ELEVATION

**NOTES:**

- DOOR IS PVC VINYL PANELS SUPPORTED BY ANODIZED ALUMINUM FRAMING AND RETAINERS. CENTER PANELS ARE CLEAR VINYL .3\"/>
- CASING FRAME AND HEADER ARE 14 GA GALVANIZED STEEL CHANNELS.
- DOOR HARDWARE HAS A CORROSION PROTECTIVE FINISH.
- VESTIBULE IS CONSTRUCTED OF 16 GA. GALVANIZED AND INSULATED WALLS AND CEILING.
- DOOR SUPPLIED WITH TWO REMOTE PULL CORD SWITCHES AND PLASTIC PULL CORD. 120 VOLTS REQUIRED FOR HEATED SWITCHES. WIRING BETWEEN SWITCHES AND VESTIBULE NOT BY JAMISON.
- MAIN CONTROL PANEL IS SHIPPED SEPARATELY. WIRING CONNECTION BETWEEN CONTROL PANEL AND POWER UNIT ON HEADER NOT BY JAMISON. SEE WIRING DIAGRAM. INSTALLER TO CONNECT ELECTRICAL SERVICE TO CONTROL PANEL.
- POWER UNIT AVAILABLE FOR THE FOLLOWING POWER CHARACTERISTICS ONLY: 240 OR 480 VOLTS, 60 HERTZ, 3-PHASE.
- AVAILABLE SIZES ARE 6'-0" THROUGH 10'-0" WIDTH IN CLEAR X 8'-0" THROUGH 14'-0" HEIGHT IN CLEAR.
- CURTAIN MAY SWEAT DEPENDING ON RELATIVE HUMIDITY ON WARM SIDE AND TEMPERATURE DIFFERENTIAL FROM FRONT TO BACK. IF ANY QUESTIONS, CONTACT JAMISON.
- CYCLE COUNTER INCLUDED IN MAIN CONTROL PANEL.
- DOOR EQUIPPED WITH VARIABLE SPEED DRIVE UNIT.
- TWO RADIANT HEATERS SUPPLIED WITH EACH DOOR. RADIANT HEATER CYCLE TIMER IS STANDARD.

- 230 VOLT, 3600 WATTS EACH HEATER, 7200 WATTS TOTAL, 32 AMPS TOTAL
- 460 VOLT, 3600 WATTS EACH HEATER, 7200 WATTS TOTAL, 16 AMPS TOTAL
- ADDITIONAL HEATERS REQ'D WHEN HIC EQUALS 12' OR GREATER:
- 230 VOLT, 690 WATTS EACH HEATER, 1380 WATTS TOTAL, 6 AMPS TOTAL
- 460 VOLT, 690 WATTS EACH HEATER, 1380 WATTS TOTAL, 3 AMPS TOTAL

- 120 VAC, 1 PHASE REQUIRED FOR PULL CORD HEATER, 10 AMP CIRCUIT.

**OPTIONAL FEATURES**

- |   |                          |                          |
|---|--------------------------|--------------------------|
| A. RADIO CONTROL  | YES                      | NO                       |
| B. FLOOR LOOP CONTROL BOX WITH TIME DELAY CLOSING       | <input type="checkbox"/> | <input type="checkbox"/> |
| C. MOTION DETECTOR WITH TIME DELAY CLOSING              | <input type="checkbox"/> | <input type="checkbox"/> |
| D. ELECTRIC EYE WITH TIME DELAY CLOSING                 | <input type="checkbox"/> | <input type="checkbox"/> |
| E. HOLD-OPEN PUSH BUTTON (USE WITH ITEMS B, C & D ONLY) | <input type="checkbox"/> | <input type="checkbox"/> |

**CUSTOMER:**

SCALE(S)	NONE	JOB NAME	
DATE	DRAWN	CHECKED	APPROVED
JAMISON DOOR COMPANY P.O. BOX 70 HAGERSTOWN, MARYLAND 21741		TITLE INVASION BI-FOLD POWER FREEZER DEEP VESTIBULE WITH VELCRO SEALS	

NO. H4420420E

ALL RADII  
TOLERANCE ON FRACTIONAL DIMENSIONS  
TOLERANCE ON DECIMAL DIMENSIONS

EXCEPT AS NOTED  
EXCEPT AS NOTED

E 12/14/08	KJT	CORRECTED NOTE 1 TO READ ?	CS-1116
D 12/14/08	KJT	DRAWN NOTES	CS-1113
C 17/24/07	DCCH	ADDED EXTRA HEATERS	CS-1047
B 15/21/07	DTL	MODIFIED W.I.H.C.	CS-1028
A 11/25/07	MRB	INCREASED MOTOR TO 11.25	CS-1028
LTR	DATE	BY	SUBJECT
REVISIONS			
NO. H4420420E			