


FRONT ELEVATION
OUTSIDE RIGHT MOTOR SHOWN

VERTICAL SECTION

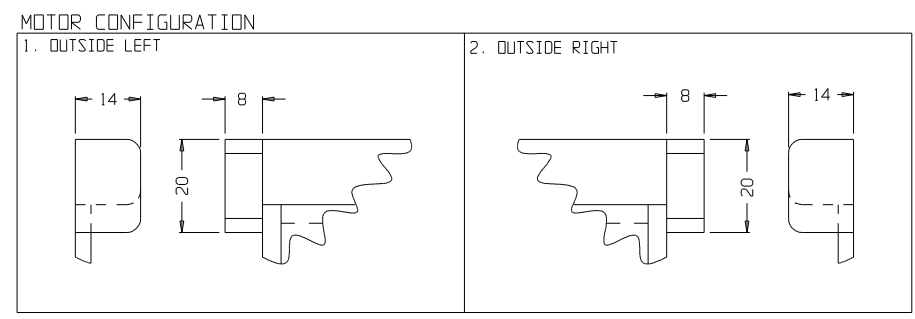

DOOR NUMBER	QUANTITY	MOTOR CONFIGURATION	SIZE IN CLEAR		TEMPERATURE CONDITIONS	
			W.I.C.	H.I.C.	FRONT	BACK

NOTES:

- DOOR PANEL 35 OZ/SQ YD POLYESTER REINFORCED PVC
- COLORS AVAILABLE:
 - WHITE A-LIKE RAL 9010 _____
 - WHITE A-LIKE RAL 9010 INSULATED _____
 - DARK BLUE A-LIKE RAL 5002 _____
 - DARK BLUE A-LIKE RAL 5002 INSULATED _____
 - ORANGE A-LIKE RAL 2004 _____
 - RED A-LIKE RAL 3002 _____
 - YELLOW A-LIKE 1003 _____
 - LIGHT GREY A-LIKE 7035 _____
 - DARK GREY A-LIKE 7037 _____
 - FDA APPROVED WHITE _____

- POWER OPERATED DOOR WITH SOFT START, DIGITAL CONTROL, NO LIMIT SWITCHES AND EXCLUSIVE AUTO SETUP WHICH INCLUDES INFRARED SAFETY BEAM AND WIRELESS SAFETY EDGE WITH PUSH BUTTON ON CONTROL PANEL AND OPENING SPEEDS UP TO 100 IN/SEC

- SPECIFY VOLTAGE:
- 208 THREE PHASE 60 HZ _____
 - 230 THREE PHASE 60 HZ _____
 - 460 THREE PHASE 60 HZ _____
 - 575 THREE PHASE 60 HZ INCLUDES TRANSFORMER TO BE INSTALLED BY CUSTOMER _____

- CONTROL OPTIONS:
 - PULL CORD _____ QTY. _____
 - PUSH BUTTON _____ QTY. _____
 - MOTION DETECTOR _____ QTY. _____
 - FLOOR LOOP _____
 - UNROLL SENSOR _____
 - PROX SENSOR IN LIEU OF PUSH BUTTON ON CONTROL PANEL _____
 - RADIO CONTROL _____
 - WIRELESS REVERSING EDGE _____

- DRUM AND BEARING FINISH
 - STAINLESS STEEL _____
 - GALVANIZED STEEL _____

- HOOD & MOTOR COVER
 - OPTIONAL STAINLESS HOOD _____
 - OPTIONAL STAINLESS MOTOR COVER _____

- WINDOW TYPES
 - STANDARD (1065MM (41.93") X 285MM (11.22")) (AVAILABLE FOR ALL ROWS AS DOOR HEIGHT PERMITS) _____
 - OVERSIZED (550MM (21.65") OR 1150MM (45.28") X 550MM (21.65")) (AVAILABLE ROWS 1,3,5 ONLY AS DOOR HEIGHT PERMITS) _____

- WINDOW POSITIONS
 - POSITION 1 _____
 - POSITION 2 _____
 - POSITION 3 _____
 - POSITION 4 _____
 - POSITION 5 _____
 - SPECIAL (SEE CUSTOMER NOTES) _____

**8. IF THERE IS ONLY ONE (1) COLUMN OF WINDOWS IT IS CENTERED IN THE DOOR PANEL

- WINDOWS NOT AVAILABLE IF DOOR IS <900MM (35.4") WIC FOR WIC >= 900MM (35.4") AND <1500MM (59.1") (1) OVERSIZED WINDOW FOR WIC >=1500MM (59.1") AND <=2850MM (112.2") (1) STANDARD/OVERSIZED WINDOW FOR WIC >= 2850MM (112.2") AND <=4850MM (190.9") (2) STANDARD/OVERSIZED WINDOWS FOR WIC >4850MM (190.9") <=6000MM (236.2") (3) STANDARD/OVERSIZED WINDOWS

- NEMA RATING
 - NEMA1 _____
 - NEMA4X SST _____
 - NEMA4X PLASTIC _____

- PRE-WIRING
 - PREWIRING FROM CONTROL PANEL TO DOOR IS CABLING AND NOT IN CONDUIT. CONDUIT IS NOT SUPPLIED BY JAMISON.

- NO PREWIRING _____
- STANDARD PREWIRING _____
- 32FT EXTENDED PREWIRING _____

CUSTOMER NOTES:

AUTHORIZED SIGNER _____
DATE _____

CUSTOMER:		JOB NAME	
SCALE(S)	NONE	XXXXXXXXXX	
DATE	XX/XX/XX	XXXXXXXXXX	
CHECKED	APPROVED	TITLE	
JAMISON DOOR COMPANY P. O. BOX 70 HAGERSTOWN, MARYLAND 21741		DYNAMICROLL PE	

REV	DATE	BY	REVISIONS
F	10-14-18	DTL	REVISED WINDOW SIZE & MISC UPDATES 2009
E	12-13-16	DFA	20 WAS 20 3/4, 18 WAS 21 3/4 2103
D	02-08-16	JRR	UPDATED WINDOW SIZES 2035
C	07-31-15	JRR	ADDED PREWIRING OPTION 1986
B	05-21-15	JRR	ADDED DRUM FINISH 1971
A	09-05-14	JRR	REMOVED INSIDE TRIM OPTION 1999

ALL DIMENSIONS EXCEPT AS NOTED TOLERANCE ON FRACTIONAL DIMENSIONS EXCEPT AS NOTED TOLERANCE ON DECIMAL DIMENSIONS EXCEPT AS NOTED

NO. H4487180F