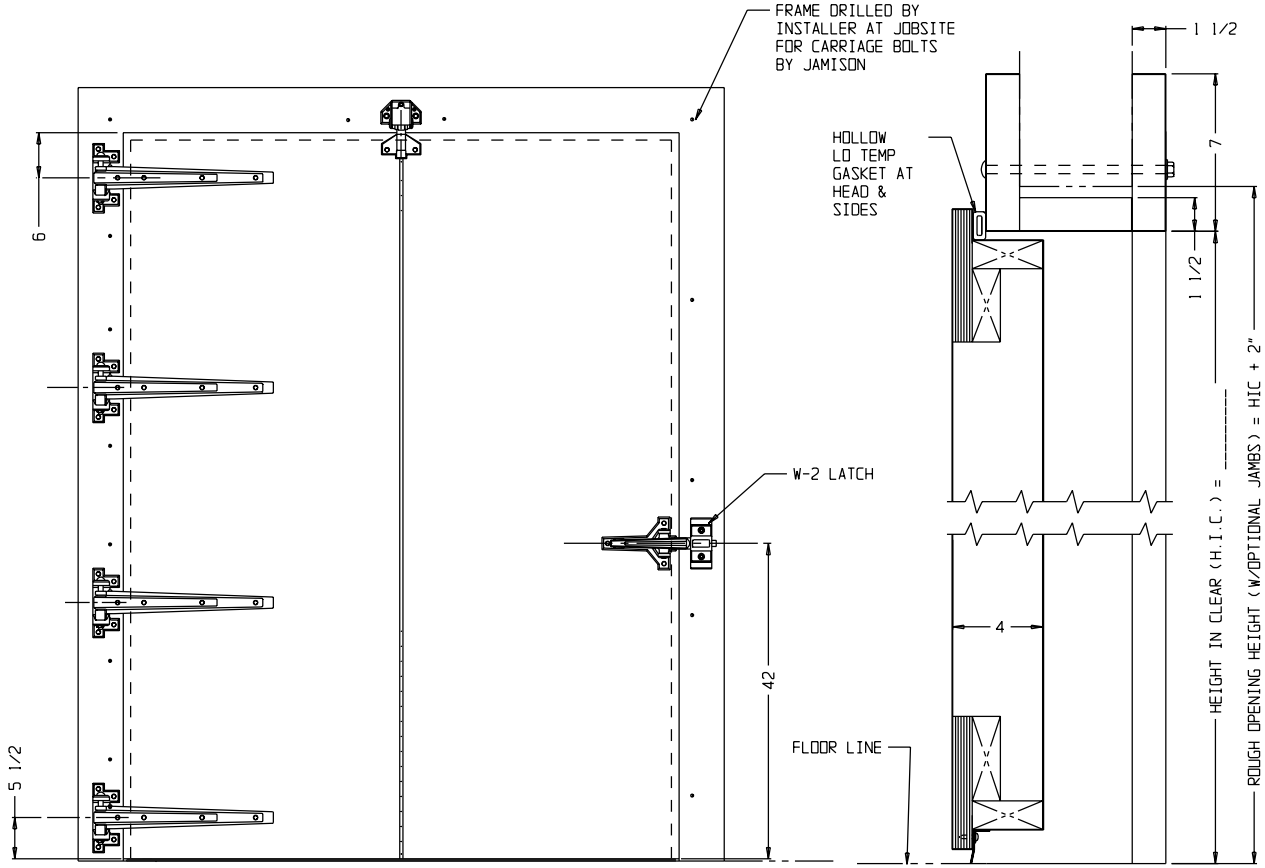

FRONT ELEVATION

LEFT HAND SWING SHOWN - RIGHT HAND OPPOSITE
_____ DOOR REQ'D _____HAND SWING

VERTICAL SECTION

NOTES:

1. DOOR PANEL TO BE "JAMIFOAM" POLYURETHANE INSULATED IN 4" THICKNESS FOR COOLER USE, WITH "R" VALUE OF 28.
2. DOOR TO BE #24 GA STAINLESS STEEL, ON FRONT BACK AND EDGES. WOOD INTERNAL STRUCTURE AND BLOCKING PROVIDED FOR HARDWARE ATTACHMENT SCREWS.
3. PLYWOOD CASINGS CLAD WITH #24 GA. STN. STEEL JAMBS AND TRIM TO BE CLAD WITH #24 GA. TYPE 304 STAINLESS STEEL WITH #4 POLISH.
4. DOOR AND FRAME TO MEET M.I.D. SPECIFICATIONS.
5. HARDWARE - CHROME
   FOUR - JB(SR) CHROME HINGES
   ONE - 1 PT W2 LATCH WITH RELEASE CHRM. FINISH
   ONE - EASY OPEN ROLLER ASSY. ON TOP CENTER FACE OF DOOR LEAF, CHROME.
   ONE - FULL HEIGHT RECESSED #10 GA HINGE PLATE
6. INTERNAL SUSPENSION ROD AND PLATES REQ'D. SEE DWG. L1894002A.
7. ALL VISIBLE FASTENINGS TO BE STAINLESS STEEL.

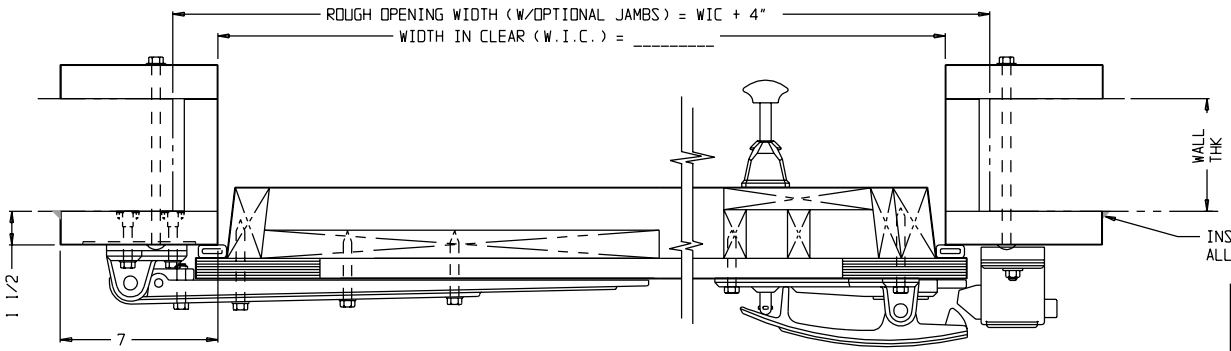

HORIZONTAL SECTION

CAUTION

1. DO NOT SCALE DIMENSIONS.
2. DO NOT SCALE BUCKS. BUCK SIZE AND DESIGN BY OTHERS, GOVERNED BY DOOR SIZE, WALL CONSTRUCTION AND CEILING HEIGHT.
3. GREATER CLEARANCE MAY BE REQUIRED AT SIDES AND/OR HEAD BY CERTAIN JOB CONDITIONS SUCH AS HIGHER SILL BEVEL OR OBSTRUCTIONS NECESSITATING COCKING OR TILTING FRAME INTO OPENING, ETC.

SCALE(S)	JOB NAME
DATE / DRAWN	
CHECKED / APPROVED	TITLE

JAMISON DOOR COMPANY
P. O. BOX 70
HAGERSTOWN, MARYLAND 21741

LTR	DATE	BY	SUBJECT
REVISIONS			
NO.			

plyfoam_1_6x8_sgl.prt