



FRONT ELEVATION

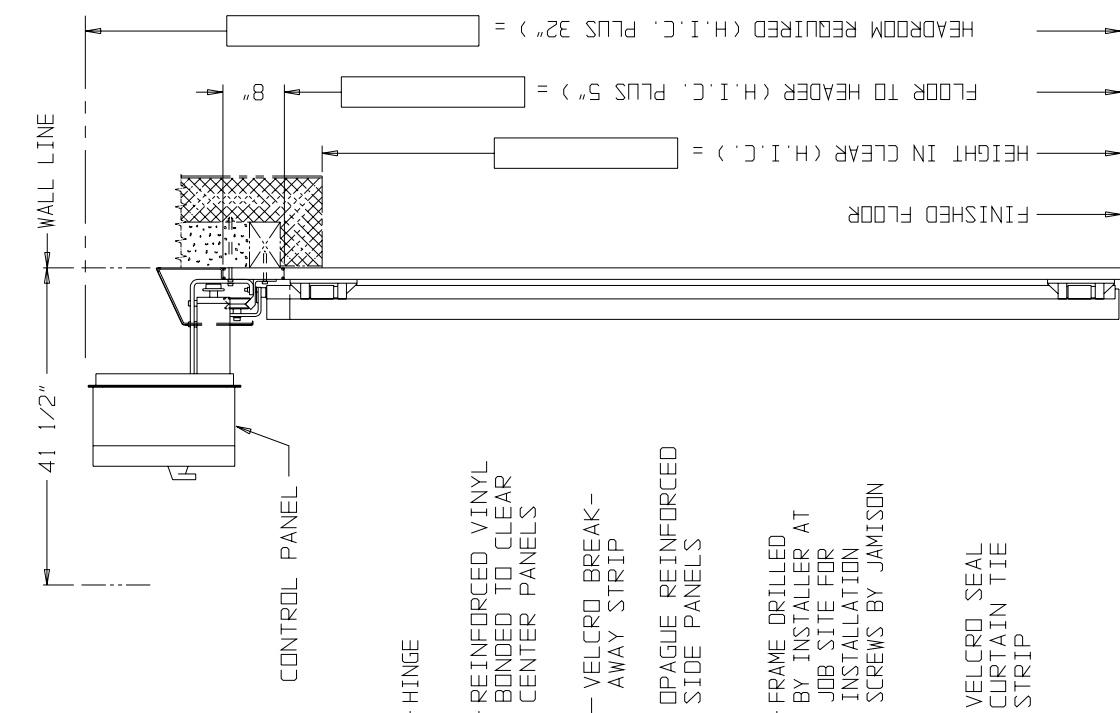

SIDE VIEW

| SCHEDULE    |               |               | TEMPERATURE CONDITIONS |                              |
|-------------|---------------|---------------|------------------------|------------------------------|
| DOOR NUMBER | DOOR QUANTITY | SIZE IN CLEAR | *ELECTRICAL DATA       | TEMPERATURE CONDITIONS       |
|             |               | W.I.C.        | H.I.C.                 | VOLTS HERTZ PHASE FRONT BACK |
|             |               |               |                        |                              |
|             |               |               |                        |                              |
|             |               |               |                        |                              |

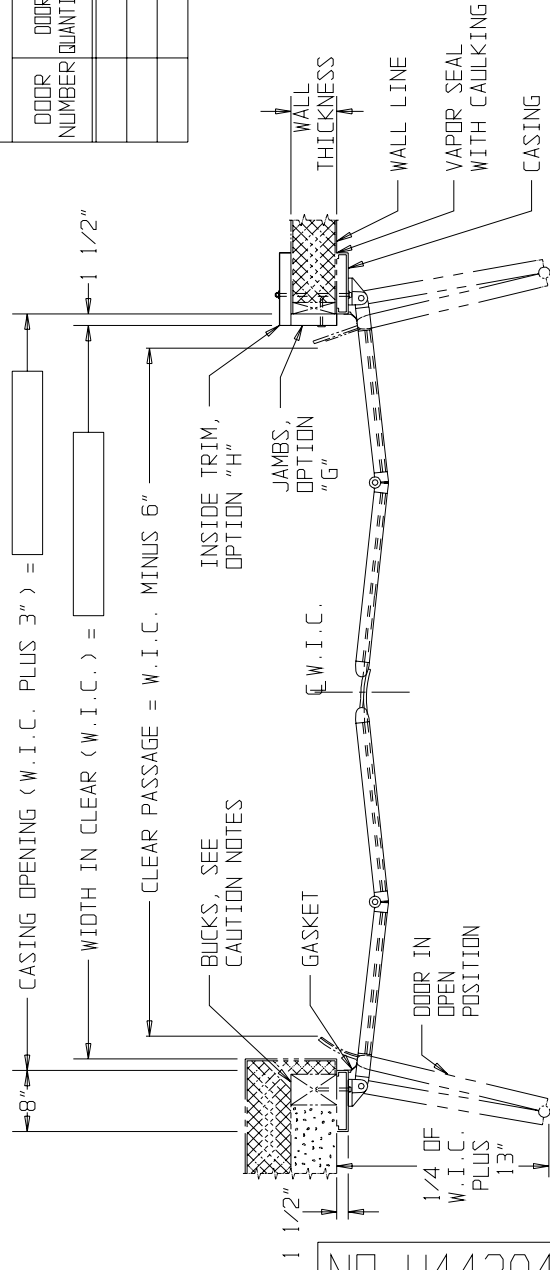

HORIZONTAL SECTION

NOTES:

- DOOR IS PVC VINYL PANELS SUPPORTED BY ANODIZED ALUMINUM FRAMING AND RETAINERS. CENTER PANELS ARE CLEAR VINYL .3" THICK. SIDE PANELS ARE OPAGUE REINFORCED VINYL. PANELS ARE SUPPLIED WITH VELCRO SEALING STRIPS.
- CASING FRAME, TRACK ANGLE AND HEADER ARE ANODIZED ALUMINUM EXTRUSIONS.
- DOOR HARDWARE HAS A CORROSION PROTECTIVE FINISH.
- SHEET METAL HOOD SUPPLIED FOR HEADER WITH GRAY PAINTED FINISH.
- BUCK SUGGESTIONS FURNISHED IN INSTALLATION INSTRUCTIONS BOOKLET.
- DOOR EQUIPPED WITH VARIABLE SPEED DRIVE UNIT.
- DOOR SUPPLIED WITH TWO REMOTE PULL CORD SWITCHES AND PLASTIC PULL CORD. 120 VOLTS REQUIRED FOR HEATED SWITCHES. WIRING BETWEEN SWITCHES AND CONTROL PANEL NOT BY JAMISON.
- INSTALLER TO CONNECT ELECTRICAL SERVICE TO CONTROL PANEL. CURRENT PROTECTION PROVIDED BY THE INSTALLER.
- \*POWER UNIT AVAILABLE FOR THE FOLLOWING POWER CHARACTERISTICS ONLY: 120, 208, 230, OR 460 VOLT 60 HZ SINGLE PHASE
- AVAILABLE SIZES ARE 6'-0" THROUGH 12'-0" WIDTH IN CLEAR X 7'-0" THROUGH 14'-0" HEIGHT IN CLEAR.
- CURTAIN MAY SWEAT DEPENDING ON RELATIVE HUMIDITY ON WARM SIDE AND TEMPERATURE DIFFERENTIAL FROM FRONT TO BACK. IF ANY QUESTIONS, CONTACT JAMISON.
- CYCLE COUNTER INCLUDED IN MAIN CONTROL PANEL.

OPTIONAL FEATURES

- |  |                          |                          |
|--|--------------------------|--------------------------|
| A. RADIO CONTROL   | YES                      | NO                       |
| B. FLOOR LOOP CONTROL BOX WITH TIME DELAY CLOSING              | <input type="checkbox"/> | <input type="checkbox"/> |
| C. MOTION DETECTOR WITH TIME DELAY CLOSING                     | <input type="checkbox"/> | <input type="checkbox"/> |
| D. ELECTRIC EYE WITH TIME DELAY CLOSING                        | <input type="checkbox"/> | <input type="checkbox"/> |
| E. METAL CLAD WOOD JAMBS, 1 1/2" THICK, FOR WALL THICKNESS OF: | <input type="checkbox"/> | <input type="checkbox"/> |
| F. METAL CLAD WOOD INSIDE TRIM, 1 1/2" X 9 1/2"                | <input type="checkbox"/> | <input type="checkbox"/> |
| G. FINISH FOR ITEMS E OR F, WHEN SELECTED:                     |                          |                          |
| <input type="checkbox"/> GALVANIZED                            | <input type="checkbox"/> | STUCCO ALUMINUM          |
| <input type="checkbox"/> STAINLESS STEEL                       | <input type="checkbox"/> | PAINTED, COLOR: _____    |
| H. WALL MOUNTED CONTROL PANEL                                  | <input type="checkbox"/> | <input type="checkbox"/> |
| J. HOLD-OPEN PUSH BUTTON (USE WITH ITEMS B, C, & D ONLY)       | <input type="checkbox"/> | <input type="checkbox"/> |

CAUTION

- NOTE-1: DO NOT SCALE DIMENSIONS.  
 NOTE-2: DO NOT SCALE BUCKS. BUCK SIZE AND DESIGN BY OTHERS. GOVERNED BY DOOR SIZE, WALL CONSTRUCTION AND CEILING HEIGHT.  
 NOTE-3: GREATER CLEARANCE MAY BE REQUIRED AT SIDES AND/OR HEAD BY CERTAIN JOB CONDITIONS SUCH AS HIGHER STILL BEVEL OR OBSTRUCTIONS NECESSITATING COCKING OR TILTING FRAME INTO OPENING, ETC.

CUSTOMER:

|  |          |
|--|----------|
| SCALE(S)   | NONE     |
| DATE   | DRAWN    |
| CHECKED  | APPROVED |
| JAMISON DOOR COMPANY<br>P. O. BOX 70<br>HAGERSTOWN, MARYLAND 21741 |          |

JOB NAME: INVISION  
 TITLE: BI-FOLD POWER COOLER WITH VELCRO SEALS

|               |      |          |           |         |     |      |     |    |      |
|---------------|------|----------|-----------|---------|-----|------|-----|----|------|
| C 2/4/08      | KJT  | UPD      | NOTES     | EN 1113 |     |      |     |    |      |
| B 15/21/07    | DL   | CON      | PWR       | ACCESS  | REL | WLS  | 40" | CS | 1038 |
| A 11/25/07    | MRB  | HEADROOM | REQ'D     | WLS     | HIC | PLUS | 32" | EN | #24  |
| LR            | DATE | BY       | REVISIONS | SUBJECT |     |      |     |    |      |
| NO. H4420417C |      |          |           |         |     |      |     |    |      |