


FRONT ELEVATION  
OUTSIDE RIGHT MOTOR SHOWN

VERTICAL SECTION

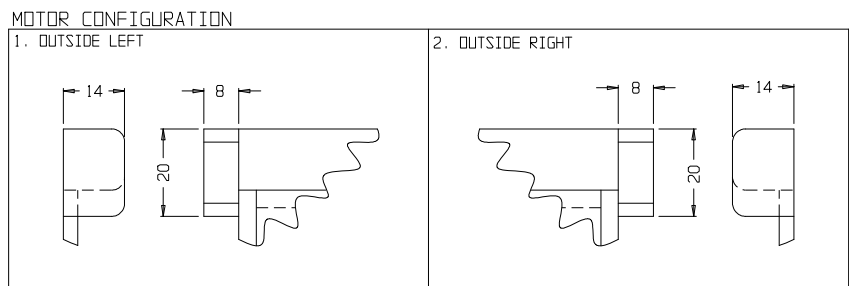

DOOR NUMBER	QUANTITY	MOTOR CONFIGURATION	SIZE IN CLEAR		TEMPERATURE CONDITIONS	
			W.I.C.	H.I.C.	FRONT	BACK
-	-	-	-	-	-	-

NOTES:

1. CURTAIN MATERIAL  
 DOOR PANEL 35 OZ/SQ YD POLYESTER REINFORCED PVC  
 COLORS AVAILABLE:  
 WHITE A-LIKE RAL 9010 \_\_\_\_\_   
 WHITE A-LIKE RAL 9010 INSULATED \_\_\_\_\_   
 DARK BLUE A-LIKE RAL 5002 \_\_\_\_\_   
 DARK BLUE A-LIKE RAL 5002 INSULATED \_\_\_\_\_   
 ORANGE A-LIKE RAL 2004 \_\_\_\_\_   
 RED A-LIKE RAL 3002 \_\_\_\_\_   
 YELLOW A-LIKE 1003 \_\_\_\_\_   
 LIGHT GREY A-LIKE 7035 \_\_\_\_\_   
 DARK GREY A-LIKE 7037 \_\_\_\_\_

2. FINISH  
 HOOD & FRAME:  
 OPTIONAL STAINLESS HOOD \_\_\_\_\_   
 OPTIONAL STAINLESS MOTOR COVER \_\_\_\_\_   
 BEARINGS:  
 GALVANIZED \_\_\_\_\_   
 STAINLESS STEEL \_\_\_\_\_   
 DRUM:  
 GALVANIZED \_\_\_\_\_   
 STAINLESS STEEL \_\_\_\_\_

3. POWER INFORMATION  
 POWER OPERATED DOOR WITH SOFT START, DIGITAL CONTROL, NO LIMIT SWITCHES AND EXCLUSIVE AUTO SETUP WHICH INCLUDES INFRARED SAFETY BEAM AND WIRELESS SAFETY EDGE WITH PUSH BUTTON ON CONTROL PANEL AND OPENING SPEEDS UP TO 100 IN/SEC SIZES DOORS CLOSE AT 24 IN/SEC UP TO 110 SQUARE FEET  
 SPECIFY VOLTAGE:  
 208 THREE PHASE 60 HZ \_\_\_\_\_   
 230 THREE PHASE 60 HZ \_\_\_\_\_   
 460 THREE PHASE 60 HZ \_\_\_\_\_

4. NEMA RATING  
 NEMA 1 \_\_\_\_\_   
 NEMA 4X STAINLESS STEEL \_\_\_\_\_   
 NEMA 4X PLASTIC \_\_\_\_\_

5. CONTROL OPTIONS  
 PULL CORD \_\_\_\_\_  QTY. \_\_\_\_\_  
 PUSH BUTTON \_\_\_\_\_  QTY. \_\_\_\_\_  
 MOTION DETECTOR \_\_\_\_\_  QTY. \_\_\_\_\_  
 FLOOR LOOP \_\_\_\_\_   
 WIRELESS REVERSING EDGE (UNAVAILABLE WITH UNROLL SENSOR) \_\_\_\_\_   
 UNROLL SENSOR (UNAVAILABLE WITH REVERSING EDGE) \_\_\_\_\_   
 PROXIMITY SENSOR IN LIEU OF PUSH BUTTON ON CONTROL PANEL \_\_\_\_\_   
 RADIO CONTROL \_\_\_\_\_

6. WINDOW TYPES  
 STANDARD (1065MM [41.93"] X 280MM [11.02"]) \_\_\_\_\_   
 AVAILABLE FOR ALL ROWS AS DOOR HEIGHT PERMITS \_\_\_\_\_   
 OVERSIZED (550MM [21.65"] OR 1150MM [45.28"] X 550MM [21.65"]) \_\_\_\_\_   
 AVAILABLE FOR ROWS, 1, 3, 5 ONLY, AS DOOR HEIGHT PERMITS \_\_\_\_\_   
 SPECIAL (SEE CUSTOMER NOTES) \_\_\_\_\_

7. WINDOW POSITION  
 POSITION 1 \_\_\_\_\_   
 POSITION 2 \_\_\_\_\_   
 POSITION 3 \_\_\_\_\_   
 POSITION 4 \_\_\_\_\_   
 POSITION 5 \_\_\_\_\_   
 SPECIAL (SEE CUSTOMER NOTES) \_\_\_\_\_

8. WINDOW NOTES  
 IF THERE IS ONLY ONE (1) COLUMN OF WINDOWS, IT IS CENTERED IN THE DOOR PANEL  
 FOR WIC < 900MM [35.4"] WIC, NO WINDOWS AVAILABLE  
 FOR WIC >= 900MM [35.4"] AND 1500MM [59.1"], (1) OVERSIZED WINDOW  
 FOR WIC >= 1500MM [59.1] AND 2850MM [112.2"], (1) STANDARD/OVERSIZED WINDOW  
 FOR WIC >= 2850MM [112.2"] AND 4850MM [190.9"], (2) STANDARD/OVERSIZED WINDOWS  
 FOR WIC >= 4850MM [190.9"] AND 6000MM [236.2"], (3) STANDARD/OVERSIZED WINDOWS

9. PREWIRING  
 PREWIRING FROM THE CONTROL PANEL TO DOOR IS CABLING AND NOT IN CONDUIT. CONDUIT NOT SUPPLIED BY JAMISON.  
 NO PREWIRING \_\_\_\_\_   
 STANDARD PREWIRING \_\_\_\_\_   
 32 FT EXTENDED PREWIRING \_\_\_\_\_

CUSTOMER NOTES:

NO. H4487180F

AUTHORIZED SIGNER \_\_\_\_\_  
 DATE \_\_\_\_\_

ALL DIMENSIONS EXCEPT AS NOTED TOLERANCE ON FRACTIONAL DIMENSIONS \_\_\_\_\_ EXCEPT AS NOTED TOLERANCE ON DECIMAL DIMENSIONS \_\_\_\_\_ EXCEPT AS NOTED

CUSTOMER: \_\_\_\_\_  
 JOB NAME: XXXXXXXXXXXX  
 TITLE: DYNAMICROLL PE  
 JAMISON DOOR COMPANY  
 P. O. BOX 70  
 HAGERSTOWN, MARYLAND 21741  
 REVISIONS:  
 NO. H4487180G

G	11-09-20	JMS	IMPROVED DRAWING FORMATTING	CS-2626
F	02-14-18	DTL	REVISED WINDOW SIZE & MISC UPDATES	CS-2309
E	12-13-16	CPA	20 WAS 20 3/4, 18 WAS 21 3/4	CS-2103
D	02-08-16	JRR	UPDATED WINDOW SIZES	CS-2035
C	07-31-15	JRR	ADDED PREWIRING OPTION	CS-1986
B	05-21-15	JRR	ADDED DRUM FINISH	CS-1971
A	09-05-14	JRR	REVISED INSIDE TRIM OPTION	CS-1890
LR	DATE	BY	SUBJECT	EQN #